

IDI Precision Machinery Ltd.

Integrity, Discipline, Innovation



IDI Diamond Coated Tools


Features:

IDI diamond coated tools have top cutting performance and the longest tool life. With specially sintered substrate, high performance tool geometry and excellent diamond coating, IDI tool's life time can exceed 12-20 times that of uncoated ones. From Year 2008, IDI becomes the only manufacture in the world, who provides both metric and English sized diamond coated tools and also diamond coated milling inserts for graphite roughing!

1
2

www.iditools.com



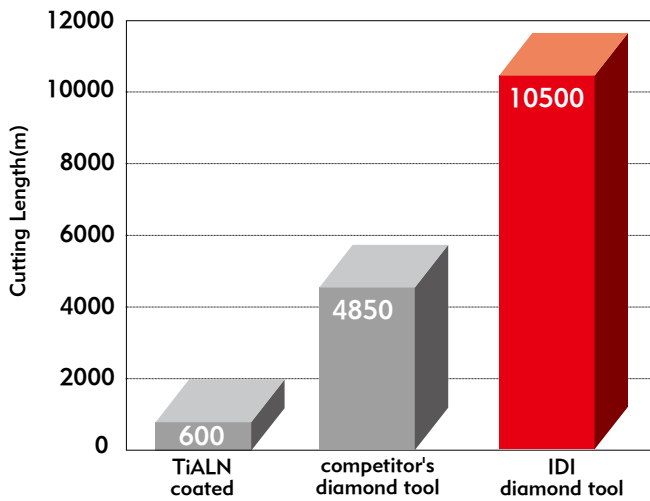

Application:

Graphite milling:

for semiconductor industry, die and mold industry..., etc.

Composite materials:

CFRP (carbon fiber reinforced plastics), Glass fiber plastics, PEEK, PBI..., etc. (contact us for this application)

Ceramics in green state machining

Cutting condition:

Tool: R3 ball nose endmill

Vc=220m/min.

Pitch=0.08mm

Graphite: POCO EDM200

Application: Graphite electrode Z level finishing

Note: Tool life depends on machine tool, tool holder, graphite hardness and surface quality requirement..., etc. The above data may not fit all cases.



Competitor's diamond tool:
after 4850m cutting length



IDI diamond tool:
after 10500m cutting length

IDI Diamond Coated Tools Codes (for Metric unit tools only)

DMS6-4-20-25-60
 1 2 3 4 5 6 7 8

- | | |
|--|---------------------------|
| 1 Diamond Coating | 4 Cutting Diameter |
| 2 M:Metric
E:English | 5 No. of Flutes |
| 3 S:Square End
B:Ball Nose
C:Corner Radius
R:Roughing Tool | 6 Flute Length |
| | 7 Effective Length |
| | 8 Overall Length |


www.iditools.com

Tools for Graphite Roughing

Shank Tools

unit:mm

Part No.	Cutting Diameter A	No. of Flutes	Flute Length B	Effective Length C	Overall Length D	Shank Diameter E
DMR3-2-9-14-50	3	2	9	14	50	3
DMR4-2-12-17-75	4	2	12	17	75	4
DMR6-2-18-23-60	6	2	18	23	60	6
DMR6-2-18-23-100	6	2	18	23	100	6
DMR8-2-24-35-100	8	2	24	35	100	8

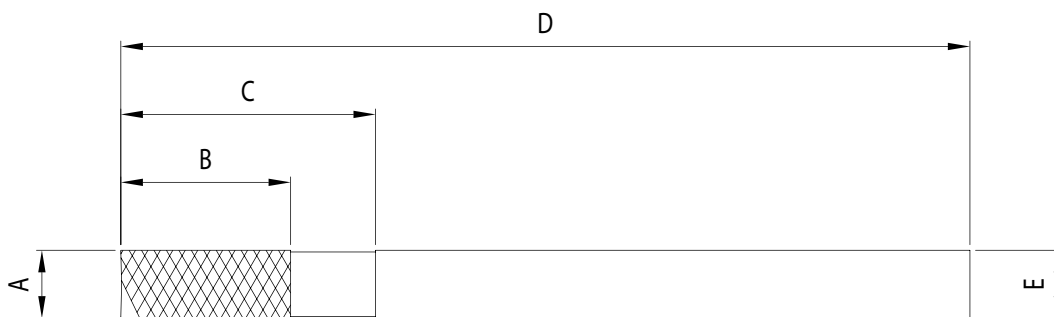

3

4

Diamond Coated Insert Systems for Graphite Cutting




unit:mm

Part No.	Cutting Diameter (mm)	Shank Diameter (mm)	Overall Length (mm)	No. of Flutes	Insert Type
T-D11R2.5-S10-L125	D11R2.5	10	125	2	RDHX0501
T-D13R2.5-S12-L150	D13R2.5	12	150	2	RDHX0501
T-D17R4-S16-L200	D17R4	16	200	2	RDHX0802
T-D21R4-S20-L200	D21R4	20	200	2	RDHX0802
T-D26R4-S25-L250	D26R4	25	250	3	RDHX0802


Part No.	Photos
RDHX0501	
RDHX0802	
SEHT1204	



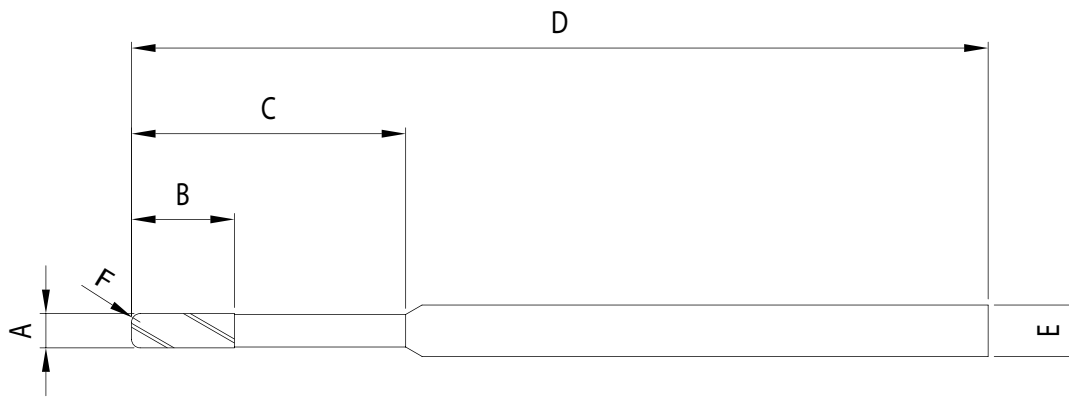



Mini Tools

unit:mm

Tool Type	Part No.	Cutting Diameter A	No. of Flutes	Flute Length B	Effective Length C	Overall Length D	Shank Diameter E
Square End 	DMS02-2-0.3-0.3-40	0.2	2	0.3	0.3	40	3
	DMS03-2-0.45-0.45-40	0.3	2	0.45	0.45	40	3
	DMS04-2-0.6-0.6-40	0.4	2	0.6	0.6	40	3
	DMS05-2-1.5-1.5-40	0.5	2	1.5	1.5	40	3
	DMS05-2-1.5-4-40	0.5	2	1.5	4	40	3
	DMS06-2-1.8-1.8-40	0.6	2	1.8	1.8	40	3
	DMS06-2-1.8-5-40	0.6	2	1.8	5	40	3
	DMS08-2-2.4-2.4-40	0.8	2	2.4	2.4	40	3
	DMS08-2-2.4-7-40	0.8	2	2.4	7	40	3
	DMS1-2-3-3-50	1	2	3	3	50	3
	DMS1-2-3-6-50	1	2	3	6	50	3
	DMS1-2-3-10-50	1	2	3	10	50	3
	DMS1-2-3-16-50	1	2	3	16	50	3
	DMS1-2-3-20-50	1	2	3	20	50	3
	DMS2-4-6-6-50	2	4	6	6	50	3
	DMS2-4-6-10-50	2	4	6	10	50	3
	DMS2-4-6-16-50	2	4	6	16	50	3
	DMS2-4-6-20-50	2	4	6	20	50	3


unit: mm

Tool Type	Part No.	Cutting Diameter A	No. of Flutes	Flute Length B	Effective Length C	Overall Length D	Shank Diameter E	Corner Radius F
Ball Nose 	DMB02-2-0.2-0.2-40	0.2	2	0.2	0.2	40	3	
	DMB03-2-0.3-0.3-40	0.3	2	0.3	0.3	40	3	
	DMB04-2-0.4-0.4-40	0.4	2	0.4	0.4	40	3	
	DMB05-2-0.5-1.5-40	0.5	2	0.5	1.5	40	3	
	DMB05-2-0.5-4-40	0.5	2	0.5	4	40	3	
	DMB06-2-0.6-1.8-40	0.6	2	0.6	1.8	40	3	
	DMB06-2-0.6-5-40	0.6	2	0.6	5	40	3	
	DMB08-2-0.8-2.4-40	0.8	2	0.8	2.4	40	3	
	DMB08-2-0.8-7-40	0.8	2	0.8	7	40	3	
	DMB1-2-3-3-50	1	2	3	3	50	3	
	DMB1-2-3-6-50	1	2	3	6	50	3	
	DMB1-2-3-10-50	1	2	3	10	50	3	
	DMB1-2-3-16-50	1	2	3	16	50	3	
	DMB1-2-3-20-50	1	2	3	20	50	3	
	DMB2-4-6-6-50	2	4	6	6	50	3	
	DMB2-4-6-10-50	2	4	6	10	50	3	
	DMB2-4-6-16-50	2	4	6	16	50	3	
	DMB2-4-6-20-50	2	4	6	20	50	3	
Corner Radius 	DMC1-2-3-3-50	1	2	3	3	50	3	0.2
	DMC1-2-3-6-50	1	2	3	6	50	3	0.2
	DMC1-2-3-10-50	1	2	3	10	50	3	0.2
	DMC1-2-3-16-50	1	2	3	16	50	3	0.2
	DMC1-2-3-20-50	1	2	3	20	50	3	0.2
	DMC2-4-6-6-50	2	4	6	6	50	3	0.5
	DMC2-4-6-10-50	2	4	6	10	50	3	0.5
	DMC2-4-6-16-50	2	4	6	16	50	3	0.5
	DMC2-4-6-20-50	2	4	6	20	50	3	0.5






Standard Tools

unit: mm

Tool Type	Part No.	Cutting Diameter A	No. of Flutes	Flute Length B	Effective Length C	Overall Length D	Shank Diameter E
Square End 	DMS3-4-12-15-75	3	4	12	15	75	3
	DMS4-4-15-20-75	4	4	15	20	75	4
	DMS4-4-15-20-100	4	4	15	20	100	4
	DMS6-4-20-25-60	6	4	20	25	60	6
	DMS6-4-20-25-100	6	4	20	25	100	6
	DMS6-4-20-25-150	6	4	20	25	150	6
	DMS8-4-25-35-100	8	4	25	35	100	8
	DMS8-4-25-35-150	8	4	25	35	150	8
	DMS10-4-25-35-100	10	4	25	35	100	10
	DMS10-4-25-35-150	10	4	25	35	150	10
	DMS12-4-25-35-100	12	4	25	35	100	12
	DMS12-4-25-35-150	12	4	25	35	150	12

unit: mm

Tool Type	Part No.	Cutting Diameter A	No. of Flutes	Flute Length B	Effective Length C	Overall Length D	Shank Diameter E	Corner Radius F
Ball Nose 	DMB3-4-12-15-75	3	4	12	15	75	3	
	DMB4-4-15-20-75	4	4	15	20	75	4	
	DMB4-4-15-20-100	4	4	15	20	100	4	
	DMB6-4-20-25-60	6	4	20	25	60	6	
	DMB6-4-20-25-100	6	4	20	25	100	6	
	DMB6-4-20-25-150	6	4	20	25	150	6	
	DMB8-4-25-35-100	8	4	25	35	100	8	
	DMB8-4-25-35-150	8	4	25	35	150	8	
	DMB10-4-25-35-100	10	4	25	35	100	10	
	DMB10-4-25-35-150	10	4	25	35	150	10	
	DMB12-4-25-35-100	12	4	25	35	100	12	
	DMB12-4-25-35-150	12	4	25	35	150	12	
Corner Radius 	DMC3-4-12-15-75	3	4	12	15	75	3	0.5
	DMC4-4-15-20-75	4	4	15	20	75	4	0.5
	DMC4-4-15-20-100	4	4	15	20	100	4	0.5
	DMC6-4-20-25-60	6	4	20	25	60	6	0.5
	DMC6-4-20-25-100	6	4	20	25	100	6	0.5
	DMC6-4-20-25-150	6	4	20	25	150	6	0.5
	DMC8-4-25-35-100	8	4	25	35	100	8	0.5
	DMC8-4-25-35-150	8	4	25	35	150	8	0.5
	DMC10-4-25-35-100	10	4	25	35	100	10	1
	DMC10-4-25-35-150	10	4	25	35	150	10	1
	DMC12-4-25-35-100	12	4	25	35	100	12	1
	DMC12-4-25-35-150	12	4	25	35	150	12	1

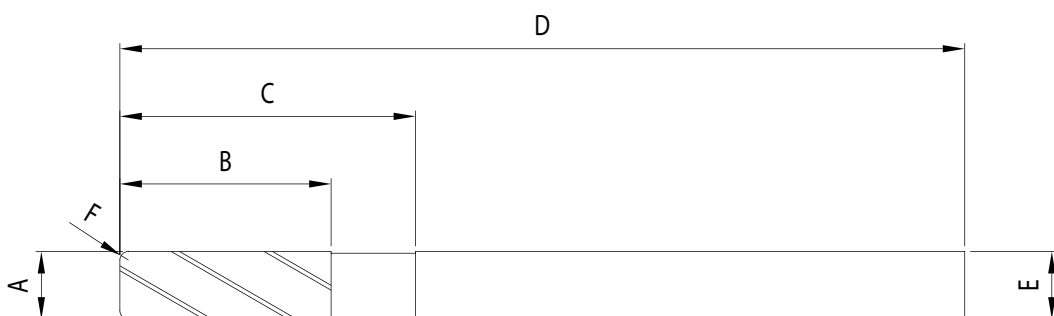

Customer Examples

Graphite Roughing:

Tool: D13R2.5 RDHX0501 diamond coated milling inserts
Spindle speed: 5000 rpm
Feedrate: 4000mm/min.
Graphite: POCO EDM200
ap=0.5mm, **ae**=7mm
Tool life: 3-4 hours/day, two inserts last about 40 work days



Graphite Finishing

Tool: DMB4-4-15-20-75 4mm ball nose end mill
Spindle speed: 6000 rpm
Feedrate: 2400mm/min.
Graphite: for semiconductor use, Shore's hardness over 70
ae=0.1mm
Tool life: over 15 times of TiALN coated tools



Ceramic Finishing

Tool: DMB1-2-3-16-50 1mm ball nose end mill
Spindle speed: 25000 rpm
Feedrate: 500mm/min.
Ceramic: Zirconia for dental use
Tool life: over 50 times of TiALN coated tools

www.iditools.com





IDI Precision Machinery Ltd.

No.138 Ln.477 Sec.2 Chung Shan Rd.,

Taiping, Taichung, 411

Taiwan

TEL: +886-4-23937395

FAX: +886-4-23934460

Website: www.iditools.com

